




SOLAR INTERCONNECTION (LOAD)

Phone: 817.444.3201 ★ tcectexas.com

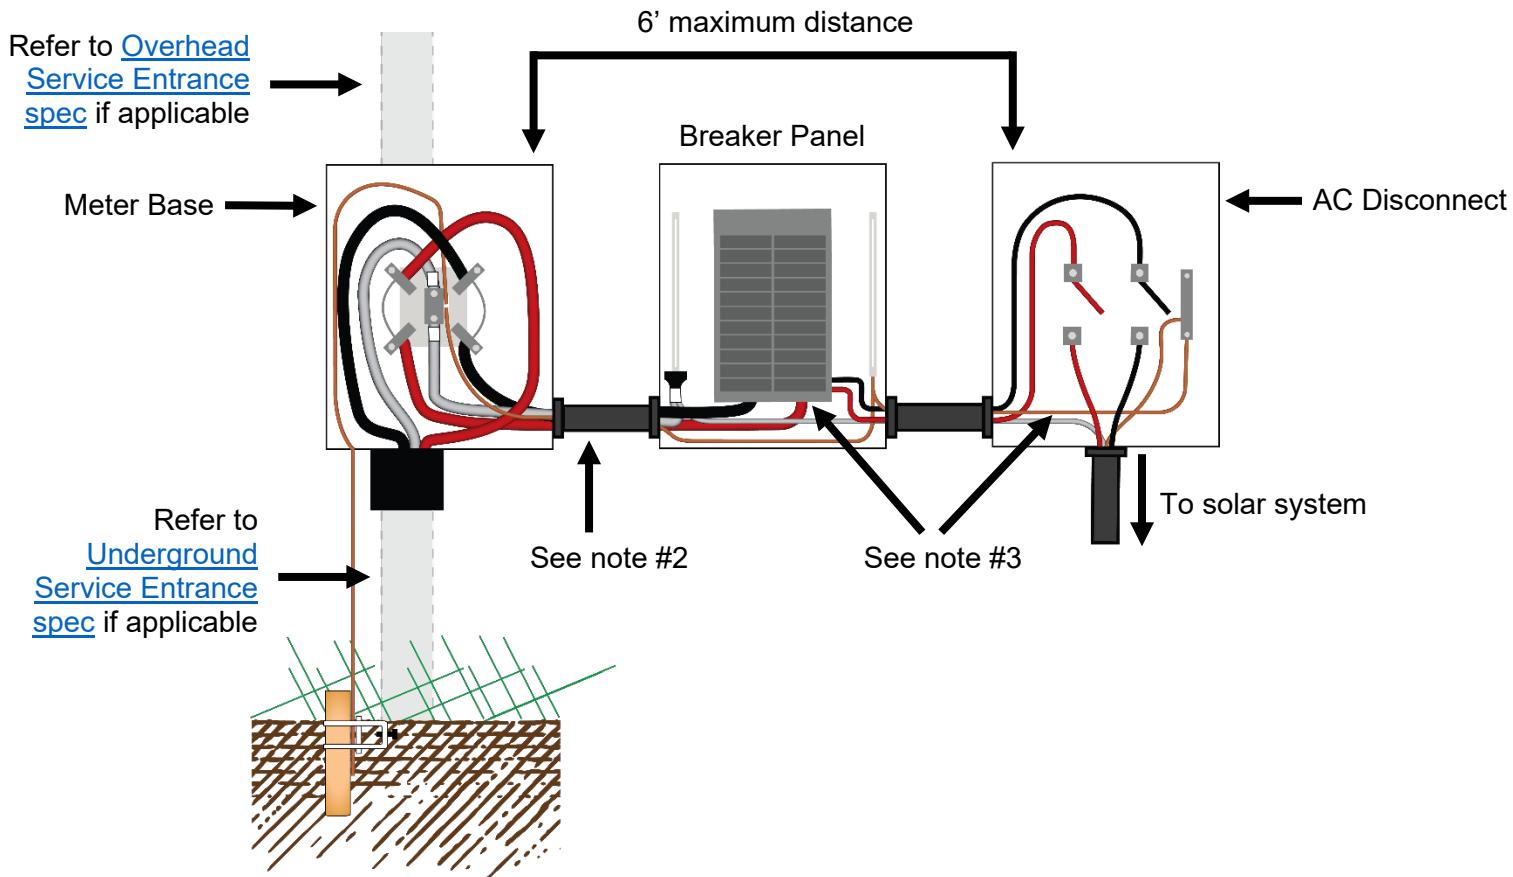

NOTES:

1. AC disconnect must be located within 6 feet of the Tri-County Electric Cooperative meter.
2. Conduit between the meter base, AC disconnect, and breaker panel must be either rigid schedule 80 PVC, rigid metal conduit, or EMT. No flexible conduit will be accepted.
3. For load side connections, the AC disconnect shall be served from a breaker in the breaker panel and therefore will not be fused. The AC disconnect shall be visible, lockable and labeled.
4. Refer to [Authorized and Unauthorized Devices spec](#) for acceptable connections. No piercing connections or Polaris plugs will be accepted in the meter base, AC disconnect, or breaker panel.
5. Refer to the [Installation Requirements: Rod + Pipe Electrodes spec](#) for ground rod installation guidelines.
6. All conductors shall meet or exceed NEC code.

WIRING COLOR KEY	
	HOT LINE 1
	HOT LINE 2
	NEUTRAL
	COPPER